

# T600/800 Series.

Discrete air flow heating  
for reception areas.



**T600 and T800** recessed thermal air heaters fit seamlessly into ceiling space above the doorway and warm the air via a neat inconspicuous ceiling grille. Output is controlled by a discrete Remote Switch Unit. Quiet, unobtrusive and energy efficient, they are an ideal solution for busy reception areas and lobbies.

**Sizes (Width)** (Joining kits available)

595mm and 895mm

**Mounting Height**

Up to 2.3m

**Colour**

Standard RAL 9016 (White)  
RAL colour matching available

**Warranty**

1 year

## Key features.



Electric

- Compact, space-saving design
- 1 year warranty
- RAL 9010 finish as standard
- Two heat settings
- Mounting height 2.3m
- Supplied complete with grille
- IP21 rated



# T600/800 Series.


Recessed.

# Thermoscreens




## T600/800 Series | Recessed

Model	Dimensions (L x W x D) (mm)	Supply (50Hz)	Heat output (kW)	Max velocity (m/s)	Max air volume (m <sup>3</sup> /h)	Weight (kg)	Noise output dB(A) @3m
T600 ER	595x346x165	230V~1P&N	1.5/3.0	4.1	300	7.5	58.0
T800 ER	895x346x165	230V~1P&N	3.0/4.5	4.5	360	8.5	58.0

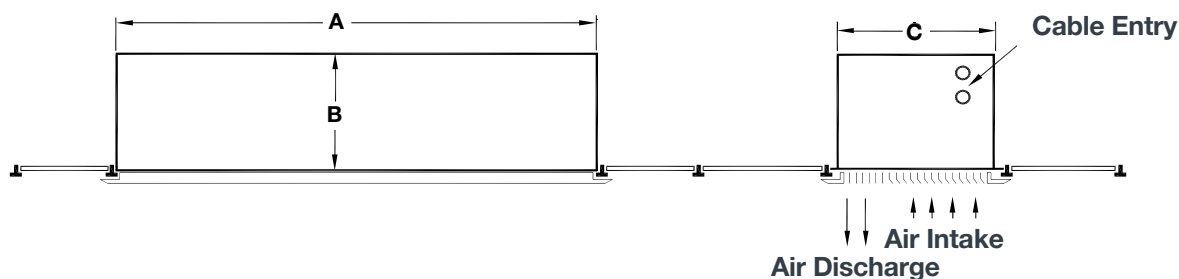

	T600	T800
A (mm)	595	895
B (mm)	165	165
C (mm)	300	300
D (mm)	570	870
E (mm)	48	46
F (mm)	250	250
G (mm)	346	346

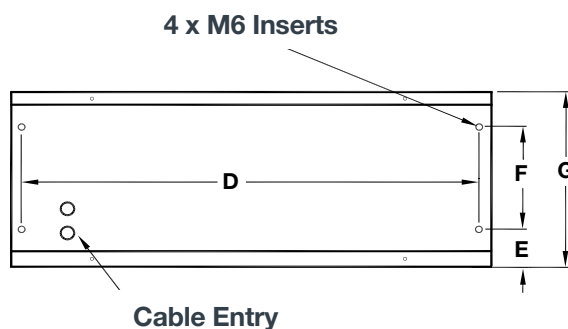

# Thermoscreens



Your environment is our expertise.

Thermoscreens were one of the pioneers of modern air curtain technology, and we remain at the forefront of its evolution today. Our sales team work hand-in-hand with an international network of distributors, providing solutions to customers of all types and sizes, in more than 50 countries. Across the globe, our name is synonymous with the highest quality standards; our products renowned for their energy efficiency, reliability and ease of use.

